




# BEARING CORP.OF AMERICA

## 60 mm x 95 mm x 23 mm 51322 51322M Thrust Ball Bearings 110X190X63mm

Bearing No. E32012J

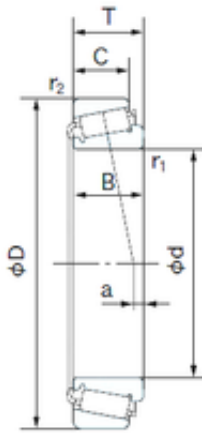

E32012J Bearing 2D drawings and 3D CAD models

Size	60x95x23 mm
Bore Diameter	60 mm
Outer Diameter	95 mm
Width	23 mm
d	60 mm
D	95 mm
T	23 mm
B	23 mm
C	17.5 mm
a	2.0 mm
r1 min.	1.5 mm
r2 min.	1.5 mm
Weight	0.609 Kg
Basic dynamic load rating (C)	86100 kN
Basic static load rating (C0)	127000 kN
(Grease) Lubrication Speed	3900 r/min
(Oil) Lubrication Speed	5200 r/min
Calculation factor (e)	0.43
Calculation factor (Y0)	0.77
Category	Roller Bearings
Inventory	0.0
Manufacturer Name	NACHI
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4991893859102



## BEARING CORP.OF AMERICA

Product Group	B04334
Bore Type	Cylindrical Bore
Configuration	Single Row
Enclosure	Open
Bore Size	60 mm
Outside Diameter	95 mm
Width	23 mm
Fillet Radius/Chamfer	1.5 mm
r1	1.5 mm
Load Center	2 mm
Dynamic Load Rating	86,100 N
Static Load Rating	127,000 N
Limiting Speed - Grease	3,900 rpm
Limiting Speed - Oil	5,200 rpm
Constant e	0.43
Axial Load Factor Y0	0.77
Axial Load Factor Y1	1.39
da (min)	68.5 mm
db (max)	67 mm
Da (min)	85 mm
Db (min)	91 mm
S1 (min)	4 mm
S2 (min)	5.5 mm
Cone ra (max)	1.5 mm
Cup ra (max)	1.5 mm